



Ruby 15

Construction materials: AISI 316 electropolished

New pump line with a brand new designing that offers reinforced pumping potentials. The updated designing provides even bigger performance provided with economy.

















Benefits

- Optimal performance
- Economical air consumption, ecological designing
- · High efficiency for pressure/capacity
- Oil free operation
- No freezing
- New air valve designing, fully controled air passing
- New generation EPDM diaphragms with embodied inner-outer piston FDA Approved

- · Easy disassembling and re-assembling
- New generation PTFE diaphragms of embodied type for long-life operation (compound) FDA Approved
- · Advanced quality Full capacity PTFE-A diaphragms FDA Approved
- · Easy manifold reverse
- · Automatic suction

Ruby 15 pump composition codes

Pump model	Body	Center block	Diaphragms	Valve Seats	Balls	0-ring	Other options
Ruby 15	SL: AISI 316 electropolished	W: PP WHITE AN: Alu Nickel Plated	E: EPDM Conductive T: TFM+(EPDM Conductive) Z: TFM-A+(EPDM Conductive)	T: PTFE V: PVDF S: AISI 316	T : PTFE S : AISI 316	T: PTFE	C : Tri Clamp



Ruby Innovative oil free air valve

The heart of the Ruby pump is our innovative, new design air valve. In respect for New Era demands, to create and offer High Quality product, with high interest for the environment and it's protection, the Air Valve of the Ruby Diaphragm Pumps has been created to offer:

- Oil free operation
- Low need for maintenance
- Not affected by minor contamination of compressed air
- Significant energy saving
- Non freezing operation
- External environment operation
- No dead centre
- ✓ Long life
- Reliability




Advance unified diaphragms featuring:

- Easy installation and maintenance
- Excellent service life
- Inventory cost reduction
- Improved performance
- Greater displacement per cycle
- No center hole, elimination of potential leak paths.
- There is no need for the main axis to be insured
- They can be screwed and unscrewed without the use of tools





Advance Unified Diaphragm offers:

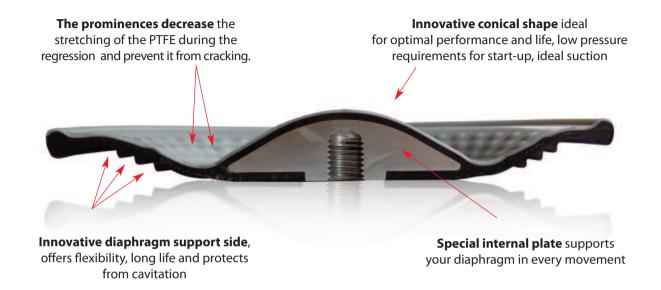

Technical data


ATEX certification	II 2 GD c IIB T4			
Construction materials	AISI 316 electropolished			
Diaphragms	EPDM Conductive FDA approved			
	Compound PTFE+Back up EPDM conductive FDA approved			
	Compound PTFE A + Back up EPDM conductive FDA approved			
Intake/delivery connections	DN 25 tri-clamp			
Air connection	1/2"			
*Max. self-priming capacity	4 m			
*Max. flow rate	72 l/min			
Max. head	70 m			
Max. air supply pressure	7 bar			
Diameter	3,0 mm			
Max. operating temp.	PVDF 95°C			
Weight AISI 316	9,0 kg			

^{*} The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.




Performance

RUBY 015 - FULL CAPACITY PTFE - A FITTED

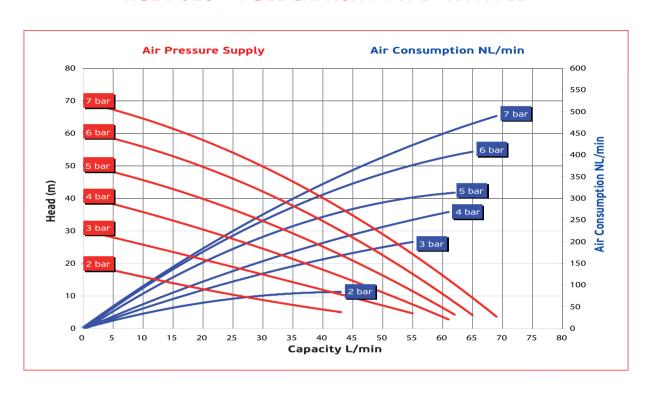


RUBY 015 - RUBBER FITTED

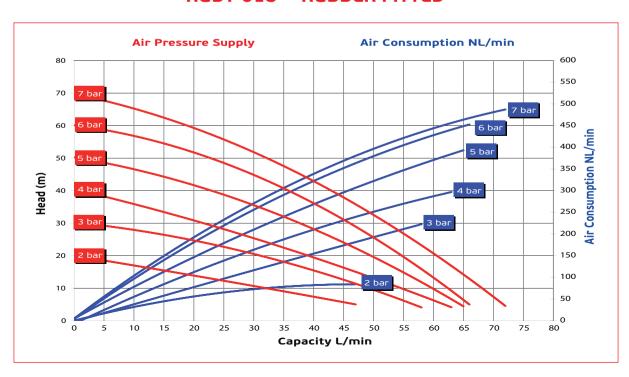




Performance

RUBY 015 - PTFE FITTED

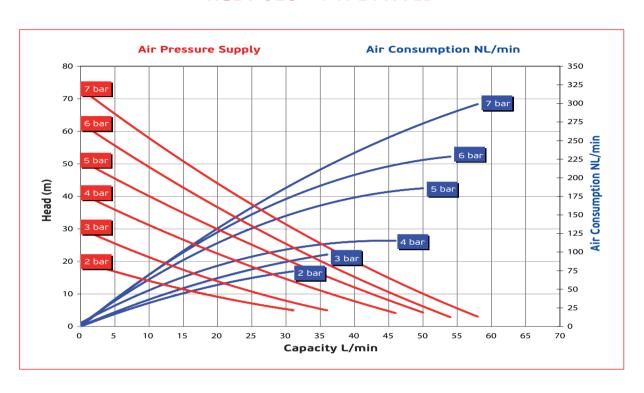

Dimensions

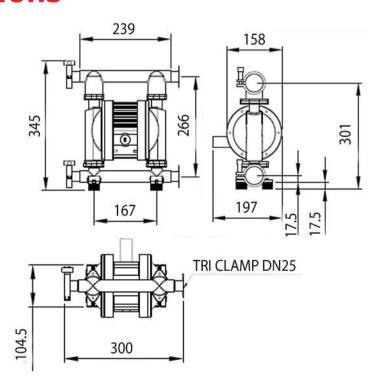



Ruby Air Operated Diaphragm Pumps







ALPHADYNAMIC PUMPS Co

England Sales office:

Rockleigh House, 37 Burton Road
Ashby de la Zouch , Leicestershire
LE65 2LF - United Kingdom (UK)
Registered in ENGLAND & WALES
Registration number 09706219 - VAT No.GB220393343
Tel +44 1213 680 324 , +44 1213 680472
email:sales@alphadynamicpumps.co.uk
www.alphadynamicpumps.co.uk

Hellas Production Facilities Unit 1

3 Eleftherias Str Industrial Park of Kifisia 14564 - Kifisia - Hellas VAT No. EL 999695309 Tel +30 210 4200 338 , +30 210 4200 422 Fax +30 211 268 68 37 email: info@alphadynamic.eu www.alphadynamic.eu

Hellas Production Facilities Unit 2

30 Seneka str Industrial Park of Kifisia 14564 - Kifisia - Greece Tel +30 215 215 9152 email: sales@rubypump.com